

ACCUMEASURE™ D series

C A P A C I T A N C E D I S P L A C E M E N T



Standard and Custom Capacitance Probes Available


True Direct Digital Capacitive Displacement Sensor

Up to 0.01% FSR Linearity

Sub-nanometer Resolution

Core Features

Highest resolution in the industry with 0.01% linearity

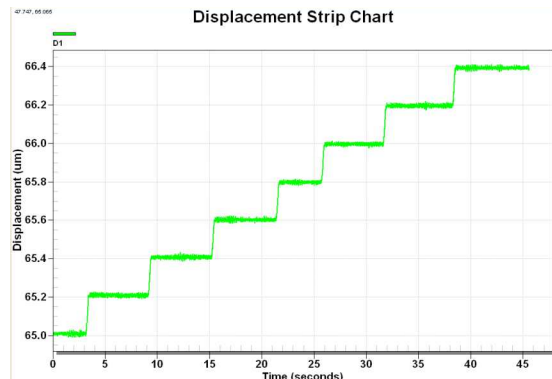

- ✓ Digitally Controlled (user adjustable):
 - Range Extension. One probe - multiple ranges
 - Selectable Frequency Filter. 0.1Hz to 5kHz
 - Sample Rate. Up to 20kHz
- ✓ 24 bit ADC bit count
- ✓ MTI Basic Software included
- ✓ NI LabVIEW™ Driver Included
- ✓ .NET (VB, C+, C++) compatible, DLL drivers available
- ✓ Thickness Mode 2 and 4 channel amplifier configuration. A pair of probes needed for thickness.


- ✓ Multiple Unit Synchronization - synchronizes several units together for multiple point measurement, such as sheet metal thickness, semiconductor measurements, etc.

Quadrature Encoder Input

The standard feature quadrature encoder input, provides probe positional information simultaneously with its displacement signal. Capacitance displacement amplifiers used with quadrature encoder inputs synchronize displacement measurements to the probe position to provide accurate surface profiles of various target types.

The Accumeasure Basic software allows calibration and display of the encoder position for profile visualization. Additionally, the DLL allows programmers to set up encoder calibration in custom programs.

- ✓ Synchronized Probe Position and Probe Displacement Measurements
- ✓ Accepts A Quad B
- ✓ Digital TTL type inputs up to 24VDC encoder input
- ✓ 200kHz Speed
- ✓ Up to 2 encoder channels

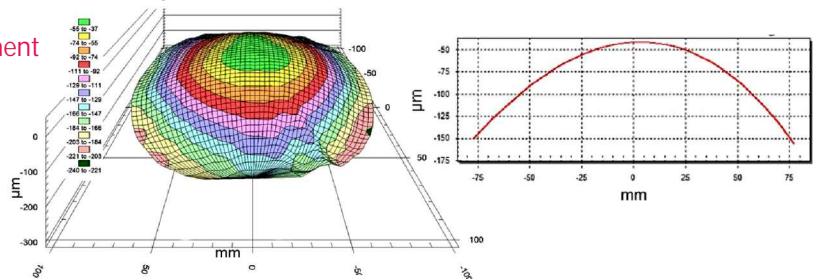

Digital and Analog Output

- ✓ 0.1 nanometer resolution (24 bit)
- ✓ Connects to PLC or PC
- ✓ Total System Solution
 - No external ADC or DAC needed
 - Ethernet or USB Digital Output
- ✓ User Adjustable Analog Output Ranges
- ✓ User Adjustable Low Pass Filter

MTI's Digital Accumeasure series comes standard with 24 bit USB/Ethernet digital output. The analog output model includes the analog output in addition to the standard digital output. Both may be used simultaneously. This is ideal for closed loop applications or integration into systems that require analog.

With the analog output models, users can select 0-5V, 0-10V, -5 to +5V or -10 to +10V output range/span. The analog output has a fast 20μs latency with a fixed 5 pole 5kHz filter, an important feature for analog closed loop applications.


What's in the Box



1, 2, 3 or 4-channel amplifier



DIN rail mount



Detachable terminal blocks



- USB flashdrive with
- MTI basic software
 - Users manual
 - Drivers



Ethernet cable (2m)
• Cat 6 network cable



USB cable
• Type A to Micro-B

The Accumeasure D series amplifier is a true revolutionary design that uses the latest technology to convert a highly reliable capacitive electric field measurement (displacement) directly into a highly precise 24 bit digital reading.

Where:

C=Capacitance


ϵ = Dielectric constant of the gap medium, typically air

D= Gap distance between the probe and grounded target

A= Probe sensing area


$$C = A\epsilon/D$$

C is proportional to D



Our new capacitance amplifier converts the probe capacitance directly to target gap (distance). This direct conversion approach eliminates errors that traditional analog amplifiers have due to analog filtering, linearization, range extension and the summing of channels to obtain thickness or step measurements.

With the Accumeasure D series, filter frequency response, sample rate, linearization and probe range are all digitally controlled. This ensures the most accurate data capture, lossless processing and the freedom from having to purchase additional acquisition hardware.

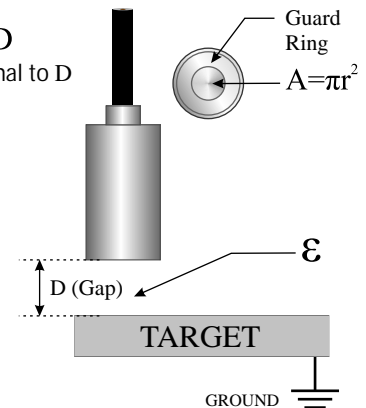

Configurations

Grounded Target Measurement

SINGLE-ENDED

MTI's Digital Accumeasure accepts from 1 to 4 single electrode probes working against a grounded target for 4 independent displacement readings.

It also includes 2 quadrature encoder Inputs that can be used to track up to two separate probe positions or an X-Y input for two dimensional tracking of a probe position.

Sample Application: To monitor a rotating shaft run out signal (Amplitude versus shaft position) where the shaft also had a rotary encoder attached.



For use with:

- D1xx
- D2xx
- D3xx
- D4xx

Floating Target Mode of Operation


Two configurations available for targets that cannot be grounded.

180°

Requires two single-ended capacitance probes that work in tandem. Each is operated 180 out of phase with each other. One probe injects current the other drains it.

This allows either displacement or thickness mode of operation when the target cannot be grounded.

Ideal for measuring thickness of floating targets either conductive or insulating.

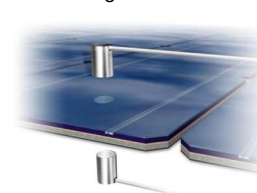

For use with:

- D2xx
- D4xx

PUSH/PULL

Each probe consists of two capacitance sensors, built into one probe body. The sensors are driven at the same voltage but 180 degree phase shift between signals. These probes have fewer operational restrictions when measuring to floating targets as capacitive fringing effects are cancelled as the two probes have identical characteristics.

One Push/Pull probe is ideal for displacement measurement, and 2 Push/Pull Probes for accurate thickness measurement.



For use with:

- D2xx
- D4xx

Tip for Accurate Ordering Process

Amplifier Main Product Code

8000-6234-XXX

of channels

Choose from 1 to 4
channels amplifier

Probe Configuration

0=single-ended probe(s)

*1= Push/Pull configuration

*2=180° configuration

* applicable to 2 or 4 channels only

Output Type

0=standard digital output

1= add analog output

single-ended

TARGET
GROUND

180°

TARGET
FLOATING

push/
pull

TARGET
FLOATING

Specifications

Measurement Range	0 to 12.5mm ¹
Noise	0.0006% FSR at 50Hz ³
Repeatability	0.000085% FSR (at a fixed point, 1 Hz bandwidth) ²
Minimum System Resolution	0.100 nm ²
Long Term Stability/Drift	20ppm /month or better at (±1 ° C)
Linearity Accuracy	±0.01% FSR ²
Frequency Response	5kHz
Output Data Rate	100 min. to 20,000 max. (samples per second)
Temperature Stability	100 ppm digital (over 0 to 40°C)
Butterworth Filter	50, 100, 500, 1kHz, or 5kHz
Range Extension	1x and 2x Default. Up to 10X max. optional (see probe charts for max probe range extension permissible)
ADC Bit Count	24-bits
Exponential Filter	No Filtering, 0.1, 1 or 10 Hz
Basic Interface	Command-Response, ASCII commands
Digital Output	Micro USB or RJ-45 Ethernet 10/100/1000
Analog Output Span	0-5V (14 bit resolution), 0-10V(15 bit resolution), -10V to +10V (16 bit resolution), -5V to +5V (15 bit resolution)
Analog Output Impedance	50 Ω, 5kHz, 5 pole Butterworth Low Pass Filter Limited
Encoder input	0-24VDC max, Threshold ~1.2 V, 32 bit, Z input/ reset input
Included Software	MTI Basic Software, LabVIEW, .NET, and DLL Drivers
Operating Temperature	0 – 40°C, 95% non-condensing (designed) 20°C, 100kPa, 50%RH (nominal)
Operating Environment	IP40 (particles to 1mm/ no water protection)
Power Requirements	24VDC±1V 50mV ripple, switching speed >60kHz. <8W estimated
Target Ground Return	Integrated with Power Connector
Input Protection	Reverse Polarity (Over Volt to 35VDC)
ESD Protection	±4kV Contact and ±8kV Air
Case Dimensions	2" (53mm) H x 4" (103mm) W x 4.7" (120mm) D
Case Mount	DIN Mount Kit
Probe Connectors	SMA Female

[1]Measurement range is determined by probe selected and amplifier gain (Range Extension)

[2]actual resolution is a function of measurement range and frequency response
please refer to probe brochures for specifications

[3]0.00000085 x Frequency Response V/Hz x FSR

Sample Product Code:

8000-6234-411

Code means you ordered:


A 4-channel digital

Accumeasure with an

analog output and with a

Push/Pull Configuration

MTI Basic Software Included



Easy user interface allows exporting data to image files or Excel® CSV files or data logging for data analysis and reports. The user settings tab allows adjustment of range, filter, data rate and other items.

Refer to MTI Accumeasure probe brochures for probe choices.



MTI offers a wide variety of standard capacitance probes. Many of our probes also operate at

multiple ranges through digital range extension. Consult the probe brochures to determine the maximum range a probe may be extended.

MTI Instruments, Inc.

325 Washington Avenue Extension

Albany, NY 12205-5505

PH: +1-518-218-2550

OR USA TOLL FREE: 1-800-342-2203

FAX: +1- 518-218-2506

EMAIL: sales@mtiinstruments.com

www.mtiinstruments.com

mtiinstruments

A subsidiary of Mechanical Technology, Inc. (MKTY)