

ENT power supply units

- modular plug-in modules
- variety of 2 power classes
- output power range of 25 - 100 W

concept:

The ENT module supplies the main voltages for the ENV amplifier module, which is the actual amplifier. The ENT and ENV modules can be placed individually into the casing. Depending on the application, several amplifier modules can be combined with one ENT power supply module in a single casing, but each system needs at least one ENT module.

There are 2 different output power classes available:

ENT 40 - 25 W output power

ENT 400 - 100 W output power

example for configuration:

power supply ENT 40 output power: 25 TE

amplifier ENV 40 power input: 6W

4 x ENV 40 = 24W

The ENT 40 can work with up to 4 ENV 40 amplifiers.

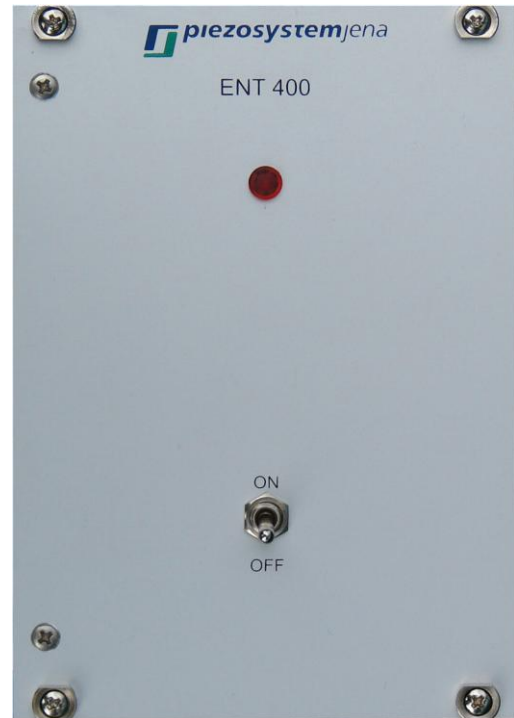


Image: ENT 400

	main voltage	output power	module width	part no.
ENT 40	230 V	25 W	14 TE	E-103-13
	110 V	25 W	14 TE	E-103-14
ENT 400	230 V	100 W	18 TE	E-103-33
	115 V	100 W	18 TE	E-103-34